MS Instruments

BALLISTIC MEASURING INSTRUMENTATION

Ensuring Constant Performance

Optical Target Type 340

- Variety of ammunition
- Primarily indoor use
- Instant graphical representation of data

Meteorological Station Type 574

- Pressure, Humidity, Temperature, and Brightness,
- Solid-state anemometer measures wind speed
- GPS and electronic compass provides wind direction data



Ballistic Data Acquisition System Type 680

- Electronic Pressure Velocity and Action Time (EPVAT) measurement
- Variety of configurations
- Complete ballistic analysis

Triple-Channel Remote Timer Unit Type 817

- Direct measurement of velocity and rate of fire
- Crystal-controlled chronometer channels
- Ballistic Coefficient use with multiple detectors

Optical Detector Type 858

- Start and stop detectors identify projectile
- Ambient light compensation and versatile installation
- Tracer and forensic applications

SENSORS

Flash Detector Type 768

Flash Detector Type 726

Acoustic Detector Type 588

Dark Ignition Detector Type 818

MS INSTRUMENTS Range Consultancy

Precision, Expertise, Quality

- Professional Bespoke Range Designs
- State-of-the-Art Product Rendering
- Only the Latest Standards

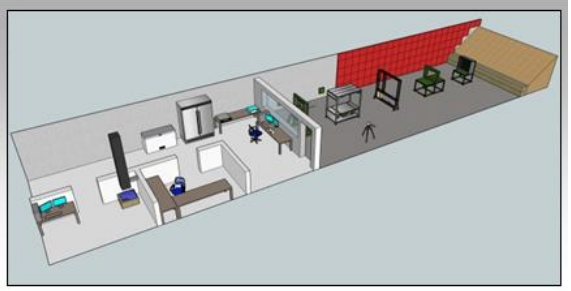

MS Instruments Ltd.
Unit 4, Ravensquay Business Centre, Cray Avenue
Orpington, Kent, BR5 4BQ, United Kingdom
Tel: +44 (0)1689 883 020
Fax: +44 (0)1689 871 392
contact@msinstruments.co.uk
www.msinstruments.co.uk

ISO 9001 SCS cert. No. 980010
ballisticmeasuringinstrumentation - Sep-15

The information in this document is correct at the stated time. MS Instruments Ltd has a policy of continuing development and reserves the right to make design changes/improvements to the products.